



Section A-A




Drilled and counterbored for 3/8-16 allen head cap screws.  
Screws at 2 1/4 long need to be shortened by about .125  
for clearance at the bottom of the base.

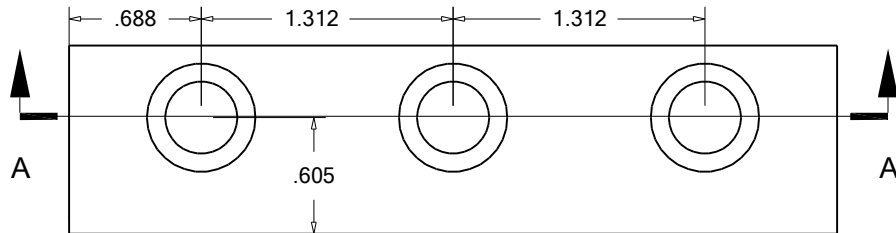


A

A

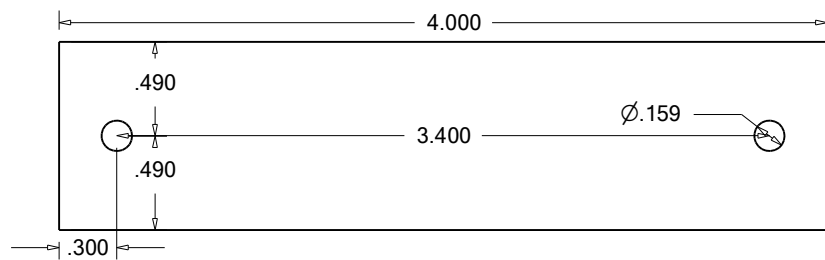

Ø.159 Holes tapped for 10-32 for actual Jaws.  
Drilled and Tapped thru entire part.

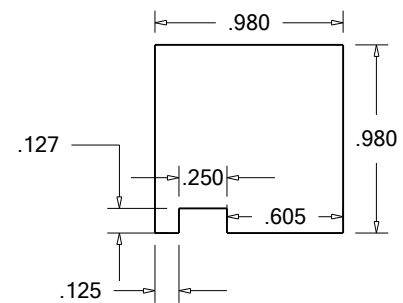

Bar Stock Vise

Fixed Jaw

Nov 5 2024 JR